



Responsive. Reliable.

Project Name/No: _____ Item No: _____

Quantity: _____ SIS#: _____ AIA/CSI#: _____


Free-Standing Ventless Recirculating Hood

Model FSH-2A-99



- The **FSH-2A-99** free-standing design allows you to add electric deep fryers in the kitchen without the need for expensive modifications or the hassles of installing, or expanding, your existing conventional ventilation hood.
- No venting outside needed. Generally, can be used where traditional ventilation hood solutions are prohibited or too costly.
- Designed with more height under the hood, which makes the **FSH-2A-99** ideal for pressure fryers, or fryers equipped with basket lifts.
- Accommodates appliances 10" to 24" wide and fits into areas with 8-foot ceilings.
- The hood is UL listed for use with approved *fryers only* and features Giles' proven 3-stage Electronic Air Cleaning, for capturing and removing grease-laden cooking vapors. Listed to **UL-YZCT (-7 for Canada) and complies with ANSI/UL710B.**
- Hood features a factory installed, self-contained, **Ansul® R102 Wet Chemical Fire Suppression System**, consisting of *Automan* release mechanism, 1-1/2 gallon tank, piping, appliance/plenum nozzles, detector link brackets and cable conduit. **Customer shall provide for final field installation, set-up, charging and commissioning ... work must be performed by an authorized Ansul® Distributor/Dealer and is not included with hood purchase.**

Design Features

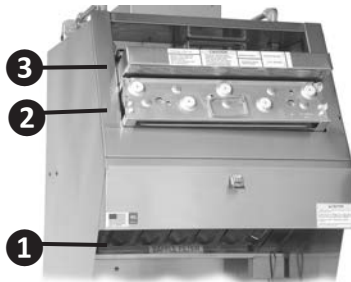

Ventless Hood 3-Stage Air Cleaning:

- Stage 1** - Stainless steel Baffle Filter traps large grease particulate.
- Stage 2** - Sustainable Electronic Air Cleaner (E.A.C.) electrostatically captures & collects fine particulate on fins within the cell.
- Stage 3** - Disposable Charcoal Filter helps to control cooking odors in the recirculated air.

Standard Features:

- Built-in interlock relay for powering the fryer under the hood.
- Complete filter set.
- Built-in fire suppression system.
- **PUSH-TO-START** switch ... hood must be manually restarted after any power interruption, in order to power appliance underneath.
- Adjustable leveling legs.
- Exhaust Air Diverter - reduces required ceiling clearance.

Optional Features:

- Interlocked appliance power receptacle installed in the hood stand. **50A max load.**

IMPORTANT INFORMATION !!

Orders for **GILES Recirculating/Ventless Hood** systems will not be accepted until Giles verifies, 1). that the Purchaser has received all necessary approvals from local authorities, 2). that the appliances to be used are within the hood's listing limitations, and 3). that the Purchaser is aware of specific installation site requirements/limitations (as stated in the **GFSE Recirculating/Ventless Hood Approval Letter**) which must be complied with during installation. The **GFSE Hood Approval Letter (HAL)** must be completed, submitted (along with any requested documentation), and approved by Giles prior to order acceptance. The document is available for download at www.gfse.com under the **SUPPORT** tab in **VENTLESS DOCUMENTS**.

Appliance Limits: IMPORTANT! HOOD LISTED ONLY FOR USE WITH ELECTRICALLY HEATED APPLIANCES ... NO GAS

Hood listed for **FRYERS only ... must conform to the following limits:**

- Maximum power: **20 kW**
- Maximum cooking surface area: **380 sq in [2,452 sq cm]**
- Maximum cooking temp: **350°F [177°C]**
- Maximum shortening capacity: **110 lbs [50 kg]**
- Fryer width (side to side): **10" [254 mm] to 24" [610 mm]**

GILES Food Service Equipment • ISO 9001-2015 Registered

PO Box 210247; 2750 Gunter Park Drive W; Montgomery, AL 36109 USA


334.272.1457 • Fax 334.239.4117 • Toll Free 800.554.4537 (US/Canada Only) • www.gfse.com • Email: services@gfse.com

Printed in USA, Form 63776 (Rel. Date: Feb.2006; Rev. Date: Feb.2020, Rev. F)

Ventless Hood Model FSH-2A-99

Project Name/No: _____ Item No: _____

Quantity: _____ SIS#: _____ AIA/CSI#: _____

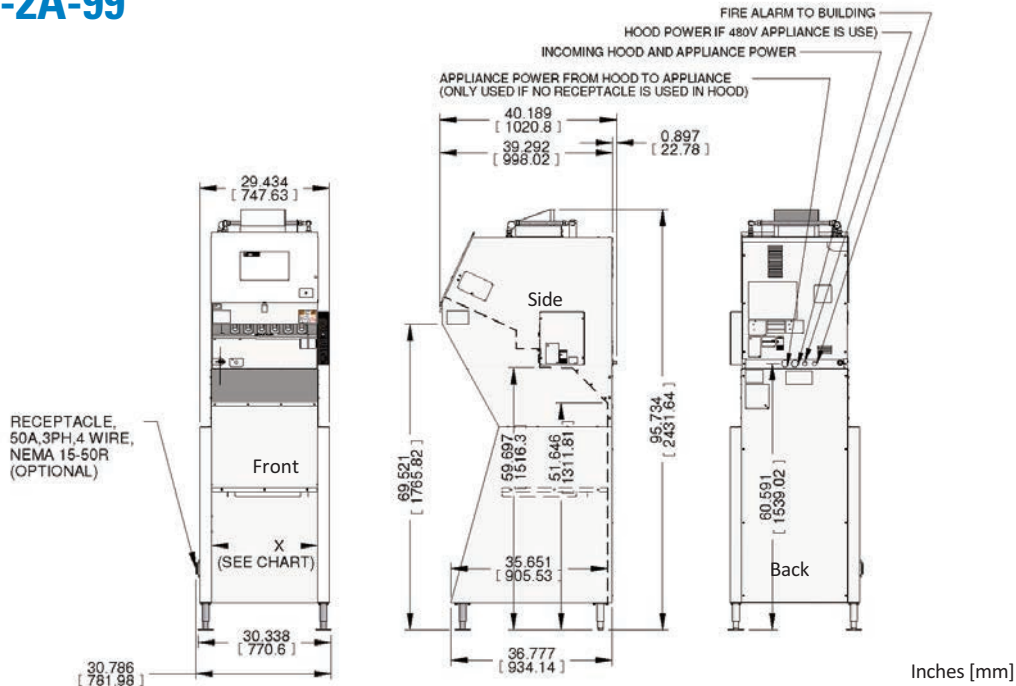

Specifications

Construction: 16, 18 & 20-ga. stainless steel ... aluminized steel as applicable

Dimensions:		
Width	Depth	Height
30-7/16" [748 mm]	40-3/16" [1021 mm]	95-47/64" [2432 mm]

Ventless Hood:

- Exhaust: 510 - 680 CFM
- Approx. Sound Level: 65 dB

Electrical Specifications: (Hood Only)		
Voltage	Phase	Amps
208-240	1 or 3	5

▪ Power cord NOT provided; field wired.

Shipping Specifications: Freight Class 125

Width	Length	Height	Cube	Crated Weight
46" [1168 mm]	106" [2692 mm]	48" [1219 mm]	135.4 cu ft [3.83 cu m]	595 lbs [270 kg]

Accessory Items Included: Baffle Filter • EAC Filter Cell • Charcoal Filter • (1) Can, Spray Foam EAC Cell Cleaner (sample)

IMPORTANT! Before Ordering

- Purchaser must obtain, read, complete, and submit the Giles Hood Approval Letter (HAL) for approval. By signing the HAL, Purchaser affirms that the intended installation site has been assessed and that it is in compliance with the minimum requirements, as stated therein ... kitchen size, ceiling height, fresh outside air supply, room air exchange rate, exhaust ventilation, clearances, etc.
- Verify that fryer to be used is within limits shown on first page ... contact factory to resolve any questions.
- Does available electrical power meet hood specifications?

How To Specify

1 Specify Appliance Opening (X)

Oversize 1/8" to 1/4" [3.2 mm - 6.4 mm] for clearance.

✓	Opening Designation	Width (X)	✓	Opening Designation	Width (X)
	A	24-1/8 [613]		E	15-5/8 [397]
	B	20-1/8 [511]		F	15-1/8 [384]
	C	18-5/8 [473]		G	14-1/8 [359]
	D	16-1/8 [410]		H	10-1/8 [257]

2 Determine Base Part Number

Choose from the following:

✓	Voltage	Hz	Ph	Filter Type	Part No.
	208-240	60	3	EAC	71831
	208-240	60	3	HEPA	71832

3 Select Options to be Factory Installed

Add OPTION CODE (or Codes in ascending order) to base part number, e.g. XXXXX-1, XXXXX-5. Standard Hood = only part no..

✓	Code	Description
	--	STANDARD - NO OPTIONS
	5	APPLIANCE RECEPTACLE, 3-PH, 50A, NEMA 15-50R

4 Extra Accessories (sold separately)

✓	Qty	Description	Part No.
		Baffle Filter	43200
		E.A.C. Collector Cell	20520
		Charcoal Filter	30248
		Foaming Spray EAC Cleaner (12-ct Case, 20-oz Cans)	41510

5 Shipping - Specify shipping method

Giles reserves the right to change specifications and/or product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement with respect to previously purchased equipment.

Printed in U.S.A. Form 63776 (Rel. Date Feb.2006; Rev. Date Feb.2020; Rev. F)



2750 Gunter Park Drive West • Montgomery, AL 36109 USA
334.272.1457 • Toll Free: 800.554.4537